# ALPHACERAM

WITH DECORATIVE FRONT PANEL

## Features

- Flush mounting.
- Thickness of tiles 8...12 mm.
- Easy maintenance.
- Panel Depth Adjusters.
- Ball bearing motor.
- 5 year warranty.

**Air flow:**
up to 215 m³/h
60 l/s

**Power:**
from 14 W

**SFP:**
from 0.28 W/l/s

**Noise level:**
from 33 dBA




Grey


Vintage



White

## Options

| Model | Alphaceram | |
|---|---|---|
| Option | T | H |
| Timer | • | • |
| Humidity sensor | | • |

- **Timer**
  - Turn-off delay adjustable from 2 to 30 min.
- **Humidity sensor**
  - Humidity setpoint adjustable from 60 % up to 90 %.

## Dimensions and mounting

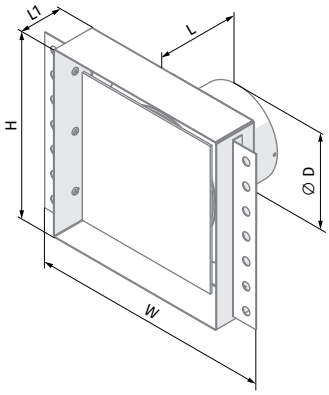


| Dimensions [mm] | Ø D | □ H | L | L1 | W |
|---|---|---|---|---|---|
| Alphaceram 100 | 99 | 204 | 86 | 48 | 264 |
| Aplhaceram 125 | 125 | 229 | 87 | 49 | 289 |




## Technical data


| Model | Alphaceram 100 | Alphaceram Max 100 | Alphaceram 125 | Alphaceram Max 125 |
|---|---|---|---|---|
| Frequency [Hz] | 50/60 | 50/60 | 50/60 | 50/60 |
| Voltage [V] | 220–240 | 220–240 | 220–240 | 220–240 |
| Power [W] | 14 | 16 | 16 | 17 |
| Current [A] | 0.1 | 0.121 | 0.117 | 0.132 |
| RPM [min⁻¹] | 2300 | 2500 | 2400 | 2500 |
| Max. air flow [m³/h (l/s)] | 90 (25) | 113 (31) | 172 (48) | 215 (60) |
| SFP [W/l/s] | 0.56 | 0.51 | 0.33 | 0.28 |
| Sound pressure level [dBA]* | 33 | 37 | 35 | 37 |
| Weight [kg] | 1.28 | 1.28 | 1.4 | 1.4 |

* Sound pressure level measured in free space at a distance of 3 meters from the fan.

**Alphaceram 100**




**Alphaceram 125**




IP24

| Designation key | | | |
|---|---|---|---|
| Alphaceram | Max | 100 | T |
| Model | High-powered motor | Spigot diameter | Option |

## Accessories

| Duct system | Flexible air ducts | Grilles and hoods | | | Speed controllers | | Clamps |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| BlauPlast | BlauFlex | Decor, GM | | | CDT E1.8 | MCD 60/0.3 | K, KZ |