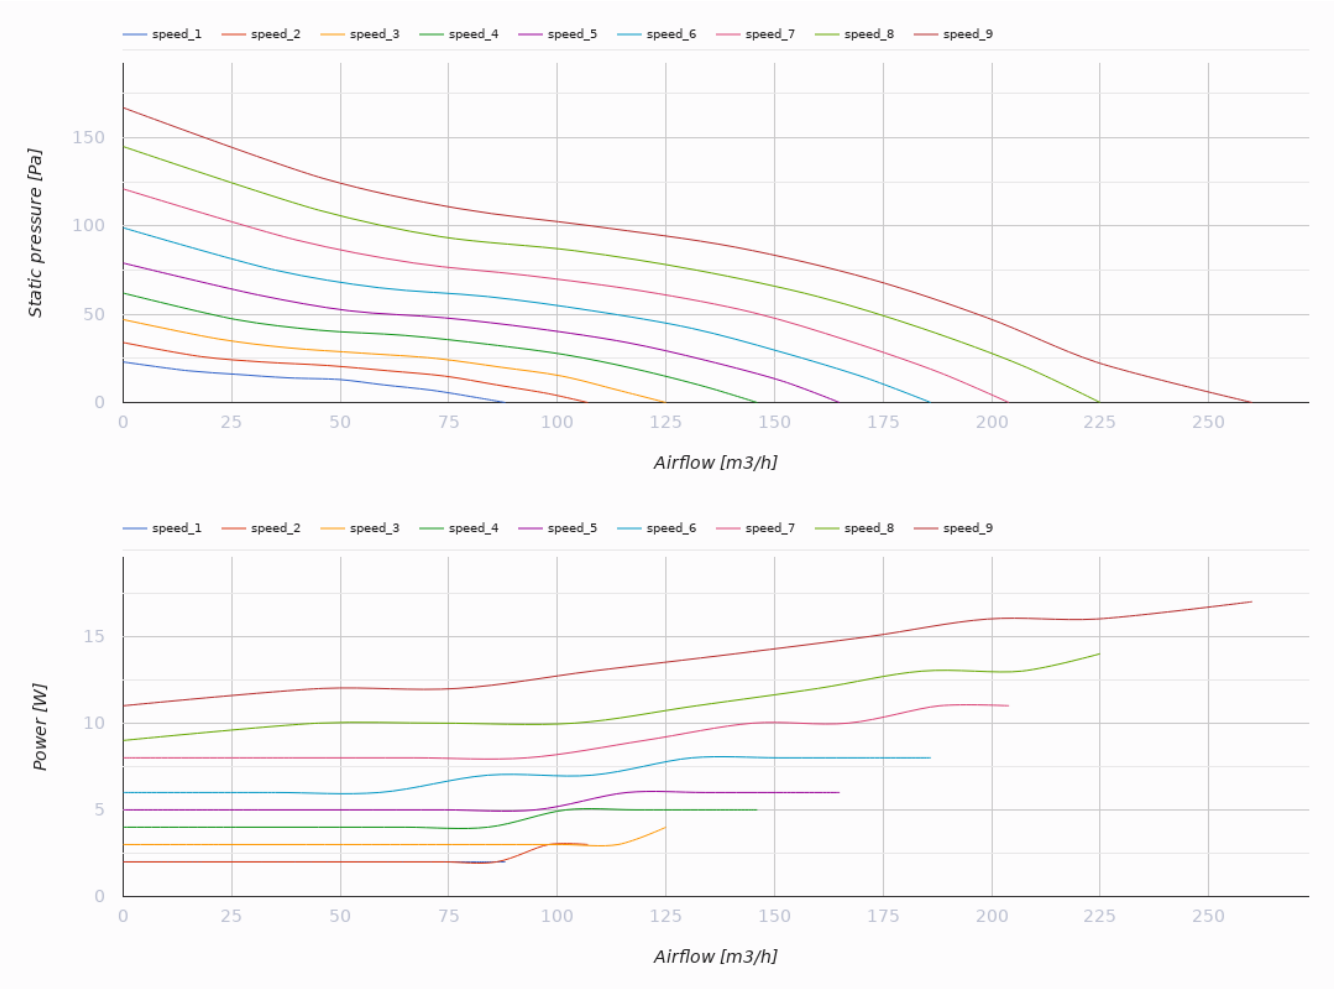


Primo EC 100

Mixed-flow inline fans with EC-motors

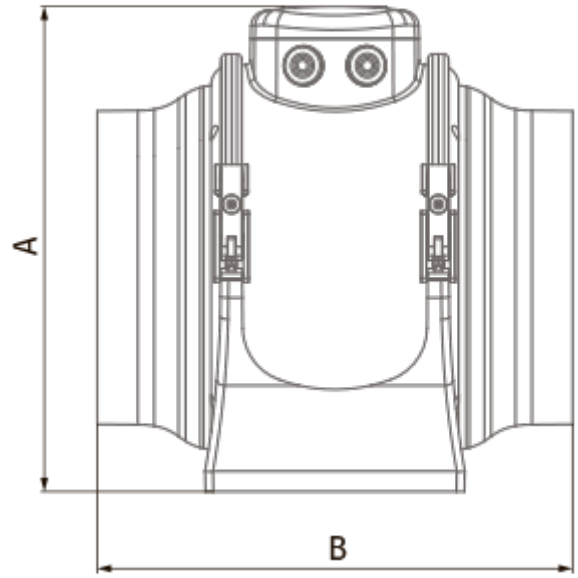
- Impeller type: Mixed-flow
- Casing material: Polypropylene
- Installation in any position

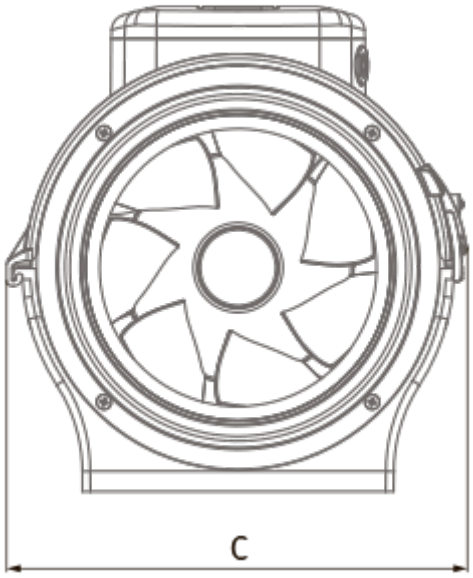
	Unit of measurement	Primo EC 100
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Maximum airflow	m^3/h	260
Weight	kg	3.7
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44
Impeller material	-	Plastic

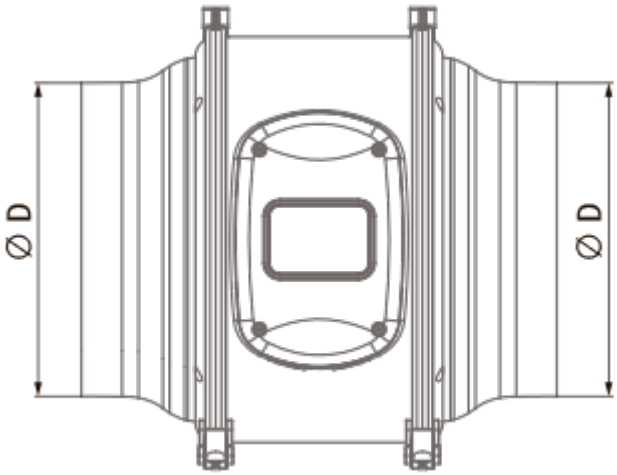


Dimensions

A	B	C	Ø D
242	330	226	100


A
B


C


∅ D
∅ D

Accessories

Water heaters

Name	Photo	Description
WKH 100-2		Duct water heaters for round ducts
WKH 100-4		Duct water heaters for round ducts

Fittings

Name	Photo	Description
K 100		Clamp for round flexible ducts