

# Sileo Max 150 ST

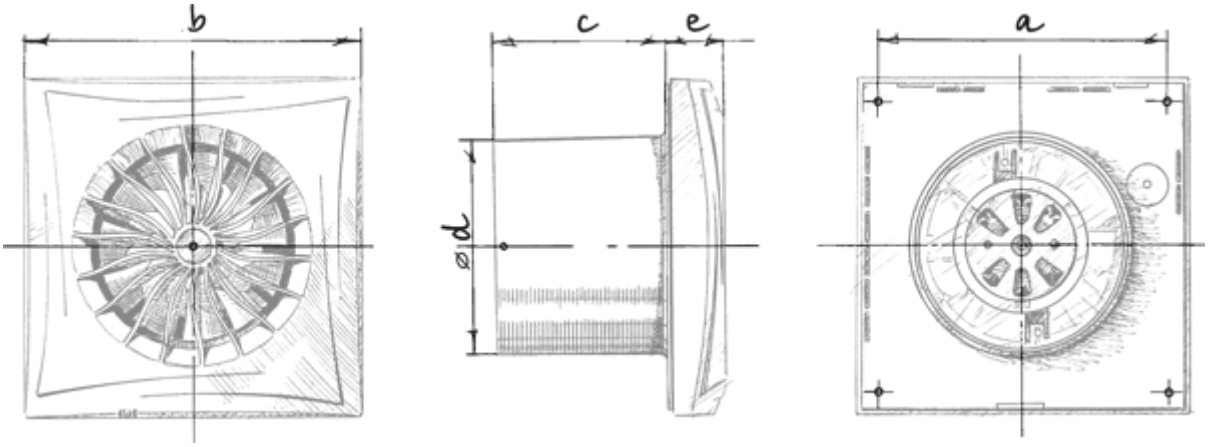
High-performance low noise extract fans

- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Pull cord
- Timer: Turn off timer

| | Unit of measurement | Sileo Max 150 ST | |
|---|---|---|---|
| Speed | - | 1 | 2 |
| Phases | - | 1 | |
| Minimum supply voltage | V | 220 | |
| Maximum supply voltage | V | 240 | |
| Power supply frequency | Hz | 50/60 | |
| Maximum airflow | m³/h | 280 | 370 |
| Weight | kg | 1.33 | |
| Ambient air temperature min | °C | 1 | |
| Ambient air temperature max | °C | 40 | |
| Ingress protection rating | - | IP45 | |
| Impeller material | - | Plastic | |

## Dimensions

| a | b | c | Ø d | e |
|---|---|---|---|---|
| 190 | 214 | 98 | 148 | 32 |


b
c
e
a
ød

## Ecodesign

| | | | | | | |
|---|---|---|---|---|---|---|
| Trademark | Blauberg | | | | | |
| Model | Sileo Max 150 ST | | | | | |
| Specific energy consumption (SEC) (kWh/(m²/a)) | Cold | | Average | | Warm | |
| | -31.4 | B | -15 | E | -5.6 | F |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | 2-speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m³/h) | 370 | | | | | |
| Electric power input (W) | 22 | | | | | |
| Reference flow rate (m³/s) | 0.078 | | | | | |
| Specific power input (SPI) (W/(m³/h)) | 0.068 | | | | | |
| Control typology | Manual control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Sound power level (dB(A)) | 52 | | | | | |
| Declared typology | RVU UVU | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 85 | | 85 | | 85 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 3355 | | 1715 | | 776 | |